



TECHNISCHE GEGEVENS TECHNICAL SPECIFICATIONS

NISSAN PRIMERA



LEVERINGSPROGRAMMA / MODEL AVAILABILITY

PRIMERA		4-deurs / 4-door		5-deurs / 5-door		stationwagon	
		5-bak	automaat	5-bak	automaat	5-bak	automaat
		5-speed	automatic	5-speed	automatic	5-speed	automatic
1.6	L	•					
	LX	•		•		•	
2.0	LX	•		•		•	
	SLX	•	•	•	•	•	•
	SE	•	•	•	•		
	GT	•		•			
2.0	LX diesel	•		•		•	
	SLX diesel	•		•		•	

UITVOERINGSSPECIFICATIES / EQUIPMENT SPECIFICATIONS

EXTERIEUR	4-/5-deurs / 4-/5-door					Wagon		EXTERIOR
	L	LX	SLX	SE	GT	LX	SLX	
voorrui van gelaagd glas	●	●	●	●	●	●	●	laminated windshield glass
groen getint glas	●	●	●	●	●	●		green tinted window glass
brons getint glas							●	bronze tinted window glass
van binnenuit verstelb. halogeen koplampen	●	●	●	●	●	●	●	height adjustable halogen head lamps
dubbel halogeen groot licht			●	●	●		●	dual halogen high beam
achteruitrijlamp(en)	2	2	2	2	2	1	1	reverse lamp(s)
mistachterlicht	●	●	●	●	●	●	●	rear fog lamp
mistlampen voor		●	●	●	●			front fog lamps
alarmknipperlichtinstallatie	●	●	●	●	●	●	●	hazard warning lights
buitenspiegel links (binnenuit verstelbaar)	●	●						remote control left door mirror
buitenspiegel rechts (binnenuit verstelbaar)	●	●						remote control right door mirror
elektrisch bedienbare buitenspiegels			●	●	●	●	●	electric remote control door mirrors
elektrisch verwarmbare buitenspiegels			●	●	●		●	electric heated door mirrors
ruitewissers 2 snelheden en interval	●							two-speed and intermittent wipers
ruitewissers 2 snelheden en var. interval		●	●	●	●	●	●	two-speed and variable intermittent wipers
achterrauwisser met interval en sproeier (5d)		●	●	●	●	●	●	rear intermittent wiper and washer (5d)
windvanger linker ruitewisser (2.0 benzine)		●	●	●	●	●	●	left side anti-lift wiperblade fin (2.0 petrol)
zwarte beschermstrips op de flanken	●	●				●	●	black side guard mouldings
beschermstrips op de flanken in kleur			●	●	●			body coloured side guard mouldings
antenne	●	●				●		antenna
elektrisch bedienbare antenne			●	●	●		●	power antenna
antenne in de achterrauw							●	diversity antenna
bumpers gedeeltelijk in carrosseriekleur		●					●	partial body coloured bumpers
bumpers volledig in carrosseriekleur			●	●	●			full body coloured bumpers
grille met chroomomlijsting	●	●	●	●	●			chrome plated front grill
buitenspiegels in carrosseriekleur			●	●	●			body coloured door mirrors
voorspoiler	●	●	●	●	●	●	●	front air spoiler
achterspoiler/side skirts in kleur					●			body coloured rear spoiler/side skirts
bumperspoiler voor en achter in kleur		●	●	●	●			coloured front + rear bumper spoiler
portierhandels in carrosseriekleur						●	●	body coloured door handles
portierhandels chroom				●				chrome door handles
aërodynamische wiel doppen	●	●	●			●	●	full wheel covers
lichtmetalen velgen				●	●			alloy wheels
roof railing							●	roof rack
ABS anti-blokkeer remsysteem		○	○	●	●	○	○	ABS Anti-lock Braking System
dubbeltonige claxon	●	●	●	●	●	●	●	dual-tone horn
stalen veiligheidsprofielen in de portieren	●	●	●	●	●	●	●	door side guard bars
INTERIEUR								INTERIOR
stuurbekrachtiging	●	●	●	●	●	●	●	power steering
in hoogte verstelbaar stuur	●	●	●	●	●	●	●	tilt steering column
3-spaaks stuurwiel	●	●				●	●	3-spoke steering wheel
4-spaaks stuurwiel			●	●	●			4-spoke steering wheel
stuurwiel met lederen rand				●	●			leather covered steering wheel rim
airbag bestuurder	○	○	●	●	●			airbag driver's side
airbag voorpassagier				●	●			airbag passenger's side front
stoelbekleding tricot	●					●		tricot seat upholstery
stoelbekleding van luxe tricot		●	●				●	deluxe tricot seat upholstery
stoelbekleding van velours				●				moquette seat upholstery
speciale GT stoelbekleding van luxe stof					●			special GT woven cloth seat upholstery
vlamvertragende stoelbekleding	●	●	●	●	●	●	●	flame resistant seat trim
sportstoelen voor					●			sport seats front
bestuurdersstoel met hoogteregeling voor- en achterzijde		●	●	●	●	●	●	driver's seat height adjustment front and rear side

● = standaard/standard ○ = optie/optional

UITVOERINGSSPECIFICATIES / EQUIPMENT SPECIFICATIONS

INTERIEUR	4-/5-deurs / 4-/5-door					Wagon		INTERIOR
	L	LX	SLX	SE	GT	LX	SLX	
instelbare lendesteun bestuurdersstoel			●	●	●		●	lumbar support driver's seat
traploos verstelbare rugleuningen voor	●	●	●	●	●	●	●	stepless reclining front seatback
hoogteverstelling hoofdsteunen voor	●	●	●	●	●	●	●	height adjustable front headrests
kantelbare hoofdsteunen voor					●			tilt adjustable front headrests
geïntegreerde hoofdsteunen achter	●							integral rear headrests
hoogteverstelling hoofdsteunen achter		●	●	●	●	●	●	height adjustable rear headrests
open type hoofdsteunen voor					●			A-frame front type headrests front
gescheiden opklapbare achterbankzitting (5d)		●	●	●	●	●	●	foldable split rear bench (5d)
deelbare achterbankleuning (60/40)		●	●	●	●	●	●	split folding rear seatback (60/40)
zithoekverstelling achterbankleuning						●	●	reclining rear seatback
centrale armsteun achter		●	●	●	●	●	●	rear centre armrest
uitneembare hoedenplank (5d)		●	●	●	●			removable rear parcel shelf
roltype afdekhoes bagageruimte						●	●	retractable luggage room cover
elektrisch bedienbare zijruiten (v+a)			●	●	●		●	power windows front and rear
centrale portiervergrendeling		●	●	●	●	●	●	central doorlocking
centrale portiervergrendeling met afstands-bediening op de benzineversies		●	●	●	●			remote control central doorlocking on petrol versions
portierbekleding afgewerkt met stof	●	●	●	●	●	●	●	cloth door inserts
wortelnotehouten inleg op middenconsole				●				wooden veneer finish on centre console
kaartenvak aan voorportieren	●	●	●	●	●	●	●	front door pockets
tunnelconsole met opbergvak	●	●	●	●	●	●	●	centre console with box
tapijt vloerbedekking	●	●	●	●	●	●	●	carpet floor covering
voetsteun bestuurder	●	●	●	●	●	●	●	driver's footrest
aantal speakers	2	4	6	6	6	4	6	number of speakers
3-punts rol gordels voor en achter	●	●	●	●	●	●	●	3-point ELR front and rear seatbelts
gordelspanners voor				●	●			seatbelt pre-tensioners front
centrale heupgordel achter	●	●	●	●	●	●	●	centre seatbelt rear
gordel uitrolblokkeersysteem v+a (ALR)	●	●	●	●	●	●	●	seatbelts front + rear with ALR system
schouderhoogteverstelling gordels voor	●	●	●	●	●	●	●	front seatbelt shoulder height adjustment
interieurverlichting over 4 portieren	●	●	●	●	●	●	●	roomlamp with 4 door switches
plafondspotjes			●	●	●		●	front spot lights
make-up spiegel in rechter zonneklep	●	●	●	●	●	●	●	vanity mirror in right side sunvisor
make-up spiegel met verlichting				●	●			vanity mirror with illumination
afsluitbaar dashboardkastje	●	●	●	●	●	●	●	lockable glove box
verlichting in dashboardkastje			●	●	●	●	●	glove box with illumination
elektronische startonderbreker	●	●	●	●	●	●	●	vehicle immobiliser
asbak voor en achter	●	●	●	●	●	●	●	ashtray front and rear
aansteker	●	●	●	●	●	●	●	lighter
verlichting asbak en aansteker		●	●	●	●	●	●	ashtray and cigar lighter illumination
anti-verblindingsbinnenspiegel	●	●	●	●	●	●	●	anti-glare adjustable rear view mirror
pookknop met leder bekleed				●	●			leather wrapped shift knob
tapijt in bagageruimte	●	●	●	●	●	●	●	carpet in luggage room
zijwanden bagageruimte bekleed	●	●	●	●	●	●	●	side trim luggage room
bagageklep bekleding (gedeeltelijk bij 4d*)	●*	●*	●	●	●	●	●	trunk lid trim (partial for sedan*)
verlichting in bagageruimte		●	●	●	●	●	●	luggage area illumination
ontgrendeling koffer- en brandstoftankklep van binnenuit	●	●	●	●	●	●	●	trunk lid and fuel filler lid opener from inside
elektrische achterklep ontgrendeling							●	electric control rear door lock
kinderslot op achterportieren	●	●	●	●	●	●	●	child safety rear door locks
handgrepen voor en achter	●	●	●	●	●	●	●	front and rear assist grips
kledinghaakje achter	●	●	●	●	●	●	●	coathanger rear

● = standaard/standard

UITVOERINGSSPECIFICATIES / EQUIPMENT SPECIFICATIONS

INSTRUMENTEN	4-/5-deurs / 4-/5-door					Wagon		INSTRUMENTS
	L	LX	SLX	SE	GT	LX	SLX	
analoog quartzklokje	•	•				•		quartz analogue clock
digitaal quartzklokje			•	•	•		•	quartz digital clock
snelheidsmeter en dagteller	•	•	•	•	•	•	•	speedometer and tripmeter
toerenteller			•	•	•		•	tachometer
brandstofvoorraadmeter	•	•	•	•	•	•	•	fuel level meter
koelvloeistoftemperatuurmeter	•	•	•	•	•	•	•	coolant temperature meter
regelbare instrumentenverlichting			•	•	•		•	illumination control
indicatie verlichting diverse schakelaars		•	•	•	•	•	•	several illuminated switches

VERWARMING/VENTILATIE					HEATING/VENTILATION			
achterruitverwarming	•	•	•	•	•	•	•	electric rear window defroster
airconditioning (benzineversies)		•	•	•	•			airconditioning (petrol versions)
aanjager met 4 snelheden	•	•	•	•	•	•	•	4-speed blower
druktoetsbediening ventilatiesysteem	•	•	•	•	•	•	•	ventilation system operated by pushbuttons
verwarming naar voertuimte achter	•	•	•	•	•			rear heater ducts
regel- en richtbare ventilatieroosters	•	•	•	•	•	•	•	adjustable air ventilators
zijruitontwaseming	•	•	•	•	•	•	•	side window defoggers

WAARSCHUWINGS-/CONTROLELAMPJES					WARNING LAMPS			
groot licht	•	•	•	•	•	•	•	high-beam
mistachterlicht	•	•	•	•	•	•	•	rear fog lamp
brandstofniveau	•	•	•	•	•	•	•	low fuel level
handrem/remvloeistofniveau	•	•	•	•	•	•	•	parking brake/brake fluid level
richtingaanwijzers/alarmlichten	•	•	•	•	•	•	•	direction indicator lamps/hazard warning
laadstroom	•	•	•	•	•	•	•	charge
oliedruk	•	•	•	•		•	•	oil pressure
airbag(s)			•	•	•			airbag(s)
achterruitverwarming	•	•	•	•	•	•	•	rear window defroster
uitgeschakelde overdrive (automaat)			•	•			•	overdrive switch off position (automatic)
niet goed gesloten portieren	•	•	•	•	•	•	•	door ajar
ABS anti-blokkeer remsysteem				•	•			ABS Anti-lock Braking System
niveau ruitesproeierreservoir			• ¹⁾	•	•		•	washer fluid level
motorcheck (noodloopsysteem) benzineversie	•	•	•	•	•	•	•	engine check (fail safe system) petrol version
snelgloeisysteem (diesel)		•	•			•	•	quick-glow system (diesel)
water in brandstoffilter (diesel)		•	•			•	•	water in fuel filter (diesel)
geluidssignaal vergeten verlichting	•	•	•	•	•	•	•	headlamp-on reminder

• = standaard/standard ¹⁾ = niet op diesel/not for diesel

TECHNISCHE GEGEVENS / TECHNICAL SPECIFICATIONS

AFMETINGEN LAADRUIMTE STATIONWAGON	laadlengte max./min.	169/95 cm	cargo length max./min.	DIMENSIONS CARGO SPACE STATIONWAGON
	laadbreedte max./min.	138/113 cm	cargo width max./min.	
	breedte/hoogte geopende achterklep	119/76 cm	width/height tail gate opening	
	max. laadhoogte	83 cm	max. cargo height	
	afstand straat-laadvloer	64 cm	cargo floor height	
	max. stahoogte onder achterklep	190 cm	open rear door height	

TECHNISCHE GEGEVENS / TECHNICAL SPECIFICATIONS

TRANSMISSIE (..) = Wagon	1.6	2.0	2.0 GT	2.0 automaat automatic	2.0 diesel	TRANSMISSION (..) = Wagon
overbrengingsverhouding :1						gear ratios :1
1e versnelling	3.333 (←)	3.063 (←)	3.063	2.861 (←)	3.333 (←)	1st gear
2e versnelling	1.955 (←)	1.826 (←)	1.826	1.562 (←)	1.955 (←)	2nd gear
3e versnelling	1.286 (←)	1.207 (←)	1.207	1.000 (←)	1.286 (←)	3rd gear
4e versnelling	0.927 (←)	0.927 (←)	0.927	0.698 (←)	0.902 (←)	4th gear
5e versnelling	0.756 (0.733)	0.733 (0.756)	0.756	–	0.733 (0.756)	5th gear
achteruit	3.417 (←)	3.154 (←)	3.154	2.310 (←)	3.417 (←)	reverse
eindreductie	4.056 (←)	4.177 (4.375)	4.177	4.072 (←)	3.895 (4.056)	final drive ratio
aandrijving	Op de voorwielen.			Front.		driving axle
koppeling	Enkelvoudige droge plaatkoppeling met automatische bijstelling, mechanisch bediend. Asbestvrij koppelingsmateriaal. Automaat: hydraulische koppelvormer.			Single dry clutch disc with automatic adjuster. Mechanical control. Automatic transmission: hydraulic torque converter. Asbestos free clutch lining materials.		clutch
automatische transmissie	4 versnellingen met automatisch lock-up systeem waarvan de 4e versnelling een elektrisch uitschakelbare overdrive is. Speciale sneeuw- en sportstand.Oliekoeler.			4-speed transmission with lock-up and deletable overdrive (fourth gear). Special snow- and sportmode. Oil-cooler.		automatic transmission

PRESTATIES EN VERBRUIK	Brandstofverbruik volgens EEG-norm (liters per 100 km)		Fuel consumption EEC-mode (liters per 100 km)		max. snelheid/ speed km/h		acceleratie/ acceleration 0-100 in sec.		PERFORMANCE AND FUEL CONSUMPTION		
	90 km/h		120 km/h								stad/ urban
	4/5d	Wagon	4/5d	Wagon	4/5d	Wagon	4/5d	Wagon			4/5d
1.6 5-bak	5.4	5.9	6.9	7.7	8.9	8.9	190	175	10.9	12.9	1.6 5-speed
2.0 5-bak	6.3	6.8	7.7	8.8	10.8	11.2	205	190	9.8	10.5	2.0 5-speed
2.0 automaat	6.6	7.1	8.3	8.9	11.9	12.3	195	175	11.4	12.2	2.0 automatic
2.0 GT 5-bak	6.4	–	8.0	–	10.5	–	220	–	8.4	–	2.0 GT 5-speed
2.0 diesel 5-bak	4.5	5.3	6.4	7.3	7.2	7.9	165	155	16.8	17.5	2.0 diesel 5-speed

AFMETINGEN/DIMENSIONS GEWICHTEN/WEIGHTS INHOUD/CAPACITIES	4-deurs / 4-door				5-deurs / 5-door				Stationwagon			
	1.6	2.0	2.0	2.0	1.6	2.0	2.0	2.0	1.6	2.0	2.0	
			GT	diesel			GT	diesel			diesel	
lengte / breedte / hoogte length / width / height	4400/1700/1390									4460/1695/1470		
wielbasis / wheelbase	2550									2550		
spoorbreedte voor/achter / tread fr/rr	1470/1460									1460/1460		
massa leeg/kerb weight	5 bak (5-speed) kg	1125	1190	1230	1190	1145	1210	1250	1210	1160	1200	1230
	aut. transm. kg	–	1215	–	–	–	1235	–	–	–	1220	–
max. toelaatbare massa permissible total weight	5 bak (5-speed) kg	1630	1730	1730	1710	1630	1750	1750	1730	1780	1810	1845
	aut. transm. kg	–	1730	–	–	–	1750	–	–	–	1840	–
max. massa aanhanger geremd perm. trailing capacity with brake	kg	1150	1350		1150	1150	1350		1150	1100	1500	1000
max. massa aanhanger ongeremd perm. trailing capacity without brake	kg	500	550			500	550			500		
max. dakbelasting/max. roof rack weight	kg	100										
max. kogeldruk trekhaak max. allowable vertical force on hitchball	kg	75										
draaicirkel koetswerk turning circle wall to wall	m	11,4	11,7		11,1	11,4	11,7		11,1	11,6		
Cw-waarde / coefficient of drag	Cw	0,31	0,30	0,29	0,30	0,31	0,30	0,29	0,30	0,34		
inhoud brandstoftank / fuel tank capacity	ltr	60										
max. inhoud bagageruimte (VDA) capacity luggageroom (VDA)	ltr	470				480				1700		

TECHNISCHE GEGEVENS

MOTOR	1.6	2.0(4-/5-d)	2.0 (Wagon)	2.0 GT	2.0 diesel
type	GA16DE	SR20De	SR20De	SR20DE	CD20
plaats	Voorin dwarsgeplaatste benzine-/dieselmotor met bovenliggende nokkenas (benzine dubbel, diesel enkel), 4 cilinders in lijn, 5x gelagerde krukas, hydraulische klepstoters (2.0).				
aantal kleppen per cilinder	4				2
cilinderinhoud cm³	1597	1998			1974
boring x slag mm	76 x 88	86 x 86			84,5 x 88
compressieverhouding :1	9,8	9,5		10,0	22,2
max. vermogen kW/pk/min-1	75/102/6000	92/125/5600	85/115/5600	110/150/6400	55/75/4800
max. koppel Nm/kgm/min-1	136/13,9/4000	170/17,3/4800	166/16,9/4800	181/18,5/4800	132/13,5/2800
ontsteking/brandstofsysteem	Elektronisch motormanagement systeem (ECCS) met zelfdiagnose.				roterende brandstof inspuitpomp
	multi-point injectie				
brandstofsoort	Euroloodvrij (RON 95)				dieselolie
katalysator	3-weg geregeld met lambdasonde				n.v.t.
accu	12 V 60 Ah				12 V 80 Ah
dynamo	12 V 70 A		12 V 80 A		12 V 70 A
luchtfilter	droog papierelement				
koeling	vloeistof, gesloten systeem, elektrische ventilator				
	n.v.t.			oliekoeler	

CHASSIS / CARROSSERIE

Wielophanging	Voor: onafhankelijk multi-link (Wagon: McPherson) met schroefveren en stabilisator. Achter: onafhankelijk (Wagon: torsie-as met Panhardstang) met schroefveren en stabilisator. Hydraulisch-gas gecombineerde schokdempers rondom.
Stuurinrichting	Tandheugel. Stuurbekrachtiging. Veiligheidsstuurkolom met stuurslot. In hoogte verstelbaar, energie-absorberend, stuurwiel op L, LX en Wagon SLX. 4- en 5-deurs SLX: airbag bestuurder; SE en GT: airbag bestuurder en voorpassagier.
Remmen	Hydraulisch, diagonaal gescheiden systeem met bekrachtiging (GT en Wagon tandem-bekrachtiger). Voor: geventileerde schijven; achter: schijven (1.6 en 2.0 diesel Wagon trommels) (bij ABS schijven achter). Remdrukregelaar (bij 1.6 Wagon en 2.0 lastafhankelijk). Anti-blokkeer remsysteem (ABS) standaard op SE en GT. Asbestvrij remvoeringsmateriaal.
Banden en velgen	1.6 en 2.0 diesel: 175/70 R14-84T op 5 1/2 JJ x 14. 2.0: 185/65R14-85H op 5 1/2 JJ x 14. 2.0 SE en 2.0 GT: 195/60 R14-85V op 6 JJ x 14 (lichtmetaal). Wagon: 1.6/2.0/2.0 diesel: 195/65 R14-89H op 5 1/2 JJ x 14. Normaal type reservewiel.
Carrosserie	Zelfdragende carrosserie voorzien van kreukelzones voor en achter. Veiligheidsprofielen in de portieren.

SERVICE EN GARANTIE

Onderhoud	Jaarlijks een onderhoudsbeurt. Indien binnen het jaar meer dan 30.000 km (benzinemotoren) of 20.000 km (dieselmotoren) wordt gereden moeten de onderhoudsbeurten met deze kilometerintervallen worden uitgevoerd. Tussen de onderhoudsbeurten wordt een inspectie en/of een olieversing uitgevoerd. Olieversen minimaal jaarlijks echter maximaal na 15.000 km (benzinemotoren) of 10.000 km (dieselmotoren). Indien er sprake is van bijzondere bedrijfsomstandigheden kan de dealer aangepaste schema's adviseren.
Garantie	3 jaar of 100.000 km, al naar gelang het eerste wat zich voordoet. 3 jaar lakgarantie en 6 jaar carrosseriegarantie tegen doorroesten van binnenuit, ongeacht het aantal km. 1 jaar of 100.000 km garantie op door de Nissan dealer gemonteerde accessoires inclusief arbeidsloon. 3 jaar of 100.000 km sleepkosten dekking. 3 jaar of 100.000 km Touring Assistance in West Europa. 24 uur Nissan Alarm Service in West Europa.



TECHNICAL SPECIFICATIONS



ENGINE	1.6	2.0(4-/5-d)	2.0 (Wagon)	2.0 GT	2.0 diesel
type	GA16DE	SR20De	SR20De	SR20DE	CD20
configuration	Transversal front mounted gasoline-/diesel engine, with overhead camshaft (petrol double, diesel single), 4 cylinder in line, 5 main bearing crankshaft, hydraulic valve adjusters (2.0).				
valves per cylinder	4				2
displacement cm³	1597	1998			1974
bore x stroke mm	76 x 88	86 x 86			84,5 x 88
compression ratio: :1	9,8	9,5		10,0	22,2
max. power kW/hp/rpm	75/102/6000	92/125/5600	85/115/5600	110/150/6400	55/75/4800
max. torque Nm/kgm/rpm	136/13,9/4000	170/17,3/4800	166/16,9/4800	181/18,5/4800	132/13,5/2800
ignition/fuel system	Electronic engine management system (ECCS) with self-diagnosis.				diesel injection pump
	multi-point injection				
recommended fuel	unleaded (RON 95)				dieseloil
catalytic converter	3-way system (closed loop)				n.a.
battery	12 V 60 Ah				12 V 80 Ah
alternator	12 V 70 A		12 V 80 A		12 V 70 A
air filter	dry paper element				
engine cooling	watercooling, closed system, electric cooling fan				
	n.a.			oil-cooler	


CHASSIS AND BODY

Suspension	Front: independent multi-link (Wagon: Mc Pherson) with coilsprings and stabilizer bar. Rear: independent strut type with coilsprings and parallel links (Wagon: trailingarms with torsion beam). Stabilizer bar. Hydraulic gas filled shock absorbers front and rear.
Steering type	Rack and pinion. Power steering. Tilt and energy-absorbing steering wheel on L, LX and Wagon SLX. Energy-absorbing steering column with steering lock. 4-/5-door SLX: airbag driver's side, SE and GT: airbag driver's and passenger's side front.
Brakes	Hydraulic diagonal distributed brake system with tandem vacuum brake booster (GT and Wagon tandem type). Front: ventilated disc brakes. Rear: disc brakes. (1.6 and 2.0 diesel Wagon drum brakes) (for ABS disc brakes rear). Load sensing valve for rear wheel brake circuit (1.6 Wagon and 2.0: dual type). Anti-lock Braking System (ABS) on SE and GT version. Asbestos free brake lining materials.
Wheels and tires	1.6 and 2.0 diesel: 175/70 R14-84T on 5 1/2 JJ x 14. 2.0: 185/65R14-85H on 5 1/2 JJ x 14. 2.0 SE and 2.0 GT: 195/60 R14-85V on 6 JJ x 14 (alloy wheels). Wagon: 1.6/2.0/2.0 diesel: 195/65 R14-89H on 5 1/2 JJ x 14. Conventional spare tire.
Body	All steel monocoque body, with safety cabin and deformation zones front and rear. Door side guard bars.

SERVICE AND WARRANTY

Maintenance	Major maintenance annually. In case within the period of one year more than 30.000 km (gasoline engines) or 20.000 km (diesel engines) are driven major maintenance is to be carried out at these kilometer intervals. Half way between two major maintenances an inspection and/or an oil change must take place. Oil changes should take place at least annually, however not later than the moment that 15.000 km (gasoline engines) or 10.000 km (diesel engines) are driven since the last maintenance. In case of extreme driving conditions your dealer will advise an accordingly adapted maintenance schedule.
Warranty	3 years or 100.000 km, whichever comes first. 3 years paint warranty and 6 years perforation from corrosion warranty, regardless of km driven. 1 year or 100.000 km warranty including labor cost on accessories installed by the Nissan dealer. 3 years or 100.000 km towing cost coverage. 3 years or 100.000 km Touring Assistance in Western Europe. 24 hours Nissan Emergency Service in Western Europe.



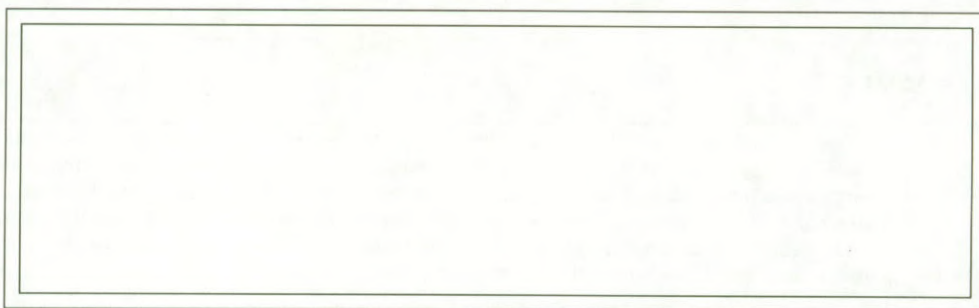

Op al onze leveranties en werkzaamheden zijn de BOVAG-standaardbepalingen van toepassing welke bij ons, alle Kamers van Koophandel en alle griffies van rechtbanken ter inzage liggen. Op verzoek worden deze u toegezonden.

All of our goods and services are covered by the BOVAG's standard conditions (BOVAG-standaardbepalingen), these being available for inspection here, at all Chambers of Commerce and at all court registrars' offices in the Netherlands.
Copies will be sent on request.



Importeur/distributor: Nissan Motor Nederland B.V., Vennestraat 13-15, 2161 LE Lisse. Tel. 02521-30111.